


GNL-1880xx (7.62x7.62) PIRANHA TYPE Flux LED Lamp

ABSOLUTE MAXIMUM RATING:(Ta=25•)

Parameter			Unit
DC Forward Current	40		mA
Reverse Voltage	5		V
Reverse Current (Vr=5V)	10		μA
Peak Forward Current ,tw ,=1 msec Duty ,=1/20	180		mA
Operation Temperature	-40	+80	• •
Storage Temperature	-40	+100	• •
Solder Dip (5 seconds, 1.6mm from body) Temperature	300	• • • •	• •

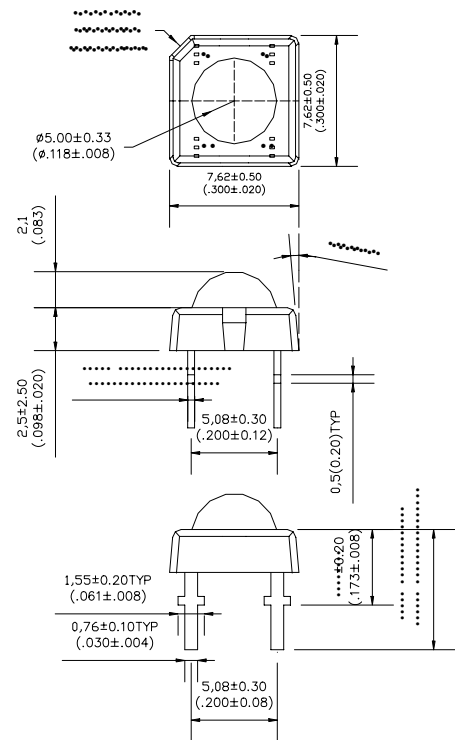

Part Number	EMITTED COLOR		Lens Color	Peak Wavelength (nm)	Vf (v) Typ.	IV (If=20mA) mcd		View Angle 2• 1/2
						Min.	Typ.	
GNL-1880UEC	AlGaInP	Orange Red	Water Clear	625	2.0	350	450	70• •
GNL-1880URC	GaAlAs	Pure Red	Water Clear	660	1.9	250	350	70• •
GNL-1880UYC	AlGaInP	Yellow	Water Clear	590	2.0	350	450	70• •
GNL-1880UEC-TL	AlGaInP	Orange Red	Water Clear	625	2.0	800	1000	70• •
GNL-1880UYC-TL	AlGaInP	Yellow	Water Clear	590	2.0	1100	1300	70• •
GNL-1880UYOC-TL	AlGaInP	Amber	Water Clear	610	2.0	1100	1300	70• •
GNL-1880UBC	InGaN	Blue	Water Clear	470	3.5	600	800	70• •
GNL-1880BGC	InGaN	Cyan	Water Clear	505	3.5	700	900	70• •
GNL-1880PGC	InGaN	Pure Green	Water Clear	525	3.5	1400	1800	70• •
GNL-1880UBC-TL	InGaN	Blue	Water Clear	470	3.5	800	900	70• •
GNL-1880BGC-TL	InGaN	Cyan	Water Clear	505	3.5	900	1100	70• •
GNL-1880PGC-TL	InGaN	Pure Green	Water Clear	525	3.5	3000	4000	70• •
GNL-1880UWC	InGaN	Ultra White	Water Clear	5500K-7000K	3.5	800	1200	70• •
GNL-1880UWC-15C	InGaN	Ultra White	Water Clear	5500K-7000K	3.5	2000	2200	70• •